
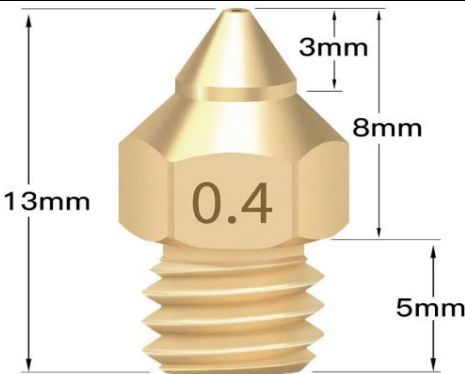


| | | |
|--|---|--------------|
| Technical Data Sheet |  | 10/23 - V1.0 |
| | | 20-M800TT |
| SIUTEC MK8 PREMIUM Nozzle - 1.75mm Brass TTS | | |
|  | | |
| Features | | |
| <p>High Thermal Conductivity: Rapid heat-up and consistent temperature.</p> <p>Precision Machining: Accurate and smooth nozzle geometries.</p> <p>Lightweight: Reduces wear on printer movement systems.</p> <p>Corrosion Resistant: Durable in varied environments.</p> <p>Cost-Effective: Economical compared to hardened steel or tungsten.</p> <p>TTS Feature: Provide enhanced wear resistance and smoother extrusion</p> | | |
| Printer List | | |
| Creality Ender 3, Creality ender 5, Creality Ender 6, Creality Sermoon, Creality Cr-10S, Creality CR-6 SE, Creality CR6, Tronxy X5SA, Tronxy Xy2, Anet A8, Anet ET4, Creality Ender 2, Creality Ender 7 | | |
| Product Specifications | | |
| Filament diameter Nozzle diameter Size Thread Material Tolerance Maximum Printing Temperature Hardness (Mohs) Thermal Conductivity Expansion Coefficient | 1.75mm 0.2/0.3/0.4/0.5mm 13x8mm M6 brass ± 0.01mm 300°C 3 105 W/mK 18 μm/m*T | |
| Applicable Materials | PLA, PLA+, ABS, TPU,PA, etc | |