

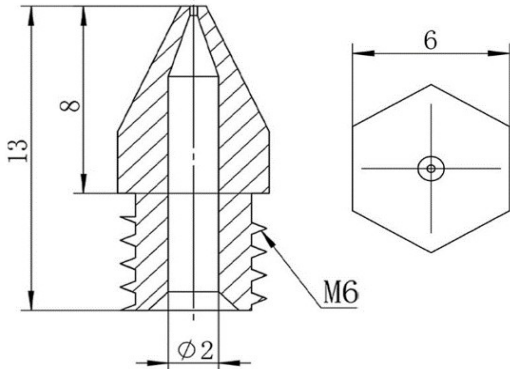


Technical Data Sheet		10/23 - V1.0
		20-M800SS
SIUTEC MK8 PREMIUM Nozzle - 1.75mm Stainless Steel		
		
Features		
<p>Durability: Resistant to wear, especially with abrasive filaments.</p> <p>Non-Reactive: Less likely to react with exotic filament additives.</p> <p>Corrosion Resistant: Well-suited for moisture-prone environments.</p> <p>Food Safe: Often used when printing for food-related applications due to its non-toxic nature.</p> <p>Cost-Effective: Economical compared to hardened steel or tungsten.</p> <p>Abrasion Resistant: Ideal for filaments with carbon fiber or metallic additives.</p>		
Printer List		
Creality Ender 3, Creality ender 5, Creality Ender 6, Creality Sermoon, Creality Cr-10S, Creality CR-6 SE, Creality CR6, Tronxy X5SA, Tronxy Xy2, Anet A8, Anet ET4, Creality Ender 2, Creality Ender 7		
Product Specifications		
Filament diameter Nozzle diameter Size Thread Material Tolerance Maximum Printing Temperature Hardness (Mohs) Thermal Conductivity Expansion Coefficient	1.75mm 0.2/0.3/0.4/0.5/0.6/0.8/1.0mm 13x6mm M6 Stainless Steel ± 0.01mm 500°C 5 20 W/mK 8 μm/m*T	
Applicable Materials	PLA, PLA+, ABS, TPU,PA,PEEK, PEI,Carbon Fiber,Fiberglas,Wood Fiber, Metafiber, etc	